


RO Tank:

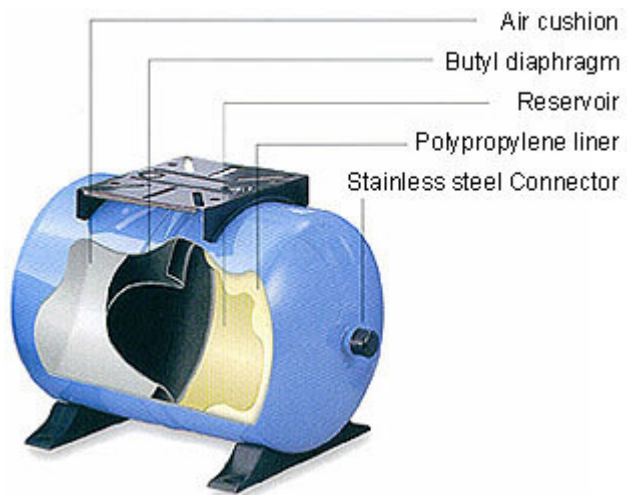

Advantages of a metal diaphragm type expansion tank

- Metal shell has greater pressure resistance than plastic.
- Lower molecular porosity of metal eliminates air pressure loss.
- Diaphragm-type design assure stable water outflow.

Features:

- Stainless steel connection built for Reverse Osmosis water storage tank; pump tank & thermal tank applications.
- Brass cap with internal O-ring guarantees no air loss from air-vent.
- Smooth internal air vent cap prevents diaphragm damaged.
- High-grade butyl diaphragm, post-cure procedure insures a tasteless and odorless water chamber
- [NSF 61 and 58 listed.](#)
- IAMPO approved.
- CE Mark approved.





Tank Sizing:

Model	Total Tank Appearance Volume		Connecter NPT	Dimension		Shipping Weight kg	Packet Volume Cu/ft	
	Gal.	liters		height mm				
				W/Stand	W/O Stand			Diameter mm
RO-120	2.1	8.0	1/4"		307	201	2.60	0.50
RO-122	3.2	12.0	1/4"	353		230	3.10	0.71
TP-12	3.2	12	1/4"		364	240	4.00	0.80
TK-903	4.4	18.0	1/4"	350		279	4.30	1.02
TP-19	5.0	19	1/4"		401	280	5.00	1.20
TK-905	5.5	21.0	1/4"	408		290	4.90	1.28
TKB-905	5.5	21.0	1/4"	408		290	4.90	1.28
TK-911	14.0	60.0	1"bsp	575		390	12.30	3.22
TK-920	20.0	80.0	1"bsp	770		390	16.70	4.43
RO-2800	28.0	100.0	1"bsp	965		390	21.30	5.64
S-1800	4.4	18.0	1/4"	350		279	4.00	1.02
ROT- 4000	4.0	15.0	1/4"	397		280.	3.20	1.20

REMARK

Maximum Working Pressure: 100PSI

All Tanks are Pre-charged at 7 PSI

All tanks are NSF listed except SS-1800(stainless steel tank) and RO-2800.